


# DELTAPURGE NG

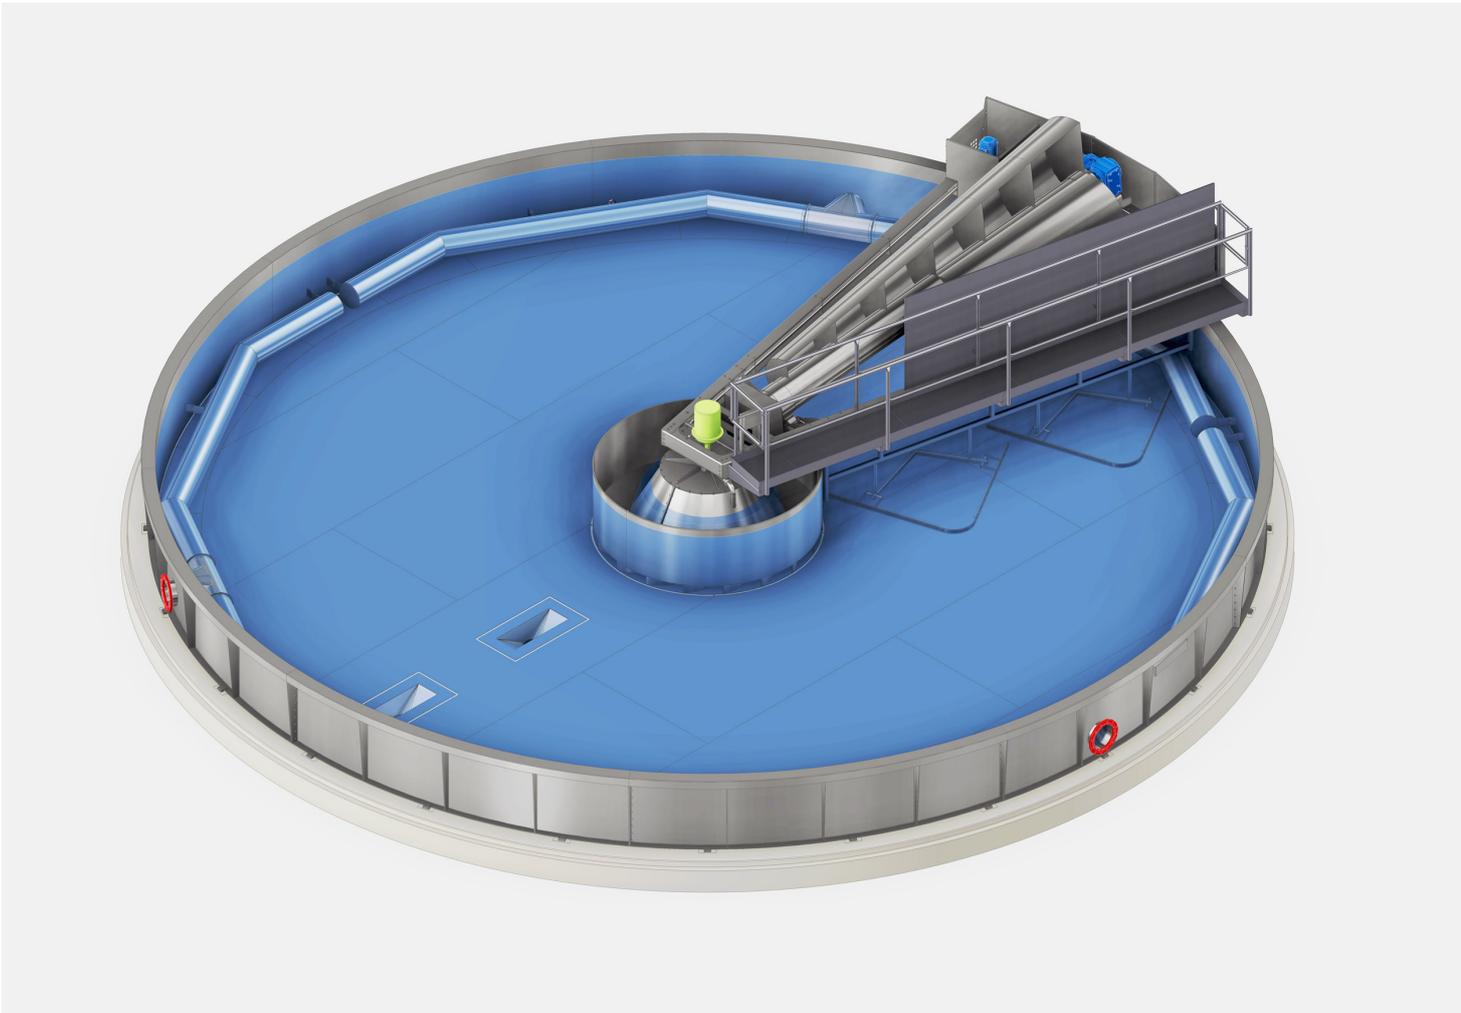

# DELTAPURGE NG

## Technology

The Deltapurge is a highly efficient circular dissolved air flotation system designed for the water clarification and the removal of solids in paper industry water circuits. The circular design provides clean open flotation area and improves the removal of suspended solids, equipped with a circulating bridge, spiral scoop and a reinforced bottom scraper. The Universal Dissolving System (UDS) generates small air bubbles that are added to the feed stream before it enters the Deltapurge to enable solids separation in the flotation process. Solid removal can be enhanced by multiple combined process steps as coagulation, flocculation or adsorption for binding (dissolved) solids to floating micro bubbles. The self-cleaning tank ensures high reliability, low maintenance and continuous operation.

## Features

- Circular flotation setup with round tank design ensures optimized hydraulic flow for solid separation and avoids buildup in dead corners.
- Equipped with a spiral scoop bridge for effective flotation sludge skimming at highest consistency and sturdy bottom scrapers for heavy sludge removal.
- Clear Water Wall allows good access and easy cleaning
- Low turbulence flow concept avoids shear forces to flocs and provides lowest chemical consumption for sustainable operation
- Suitable for various flow rates without requiring constant flow
- Central bearing with only six moving parts for high reliability and minimal wear

## Why to buy

- Consistently removing solids from process water leads to improved operation and extended equipment life in more than 500 DAF installations worldwide
- The Deltapurge allows wastewater reuse and helps to decrease freshwater consumption
- Durable components and efficient design minimize maintenance and OPEX
- Effectively reduces odorous emissions, creating a cleaner, more compliant work environment
- Self-cleaning feature and sludge flotation by micro-bubbles prevent downtime and ensure continuous operation
- inside or outside installation allows flexibility and scaling for different mill sizes




## Typical & Proven Process

- Clarification of filtrate and process loops
- Removal of colloidal contaminants, dissolved particles, ash and micro stickies
- PM White Water treatment and washer filtrate clarification
- Closed-loop water recycling to reduce freshwater demand
- Clarification of primary and secondary mill effluents

## See the following Products as well

- Universal Dissolving System
- POLYMERI & DOSING STATION
- TAL & TAM TAURO
- ELEPHANT
- RSP Sludge Press

## Specifications

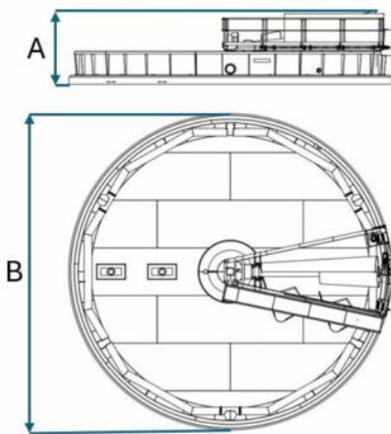

NG Size Examples	Height (A) [mm]	Diameter (B) [mm]	UDS Size
NG 3	1550	2000	30
NG 14	1870	4500	60
NG 22	2070	5755	60
NG 50	2740	8750	180
NG 90	2875	11500	360
NG 140	3260	14500	600
NG 250	3850	19500	2 x 600
NG 350	4270	22500	2 x 600



**Meri Environmental Solutions GmbH**

Bodenseestr. 113  
81243 Munich, Germany  
Tel. +49 89 59 33 44  
info@meri.de

**Voith Meri Environmental Solutions, Inc.**

2620 E. Glendale Avenue  
P.O. Box 1262  
Appleton WI 54911-1262, USA  
Tel. +1 920 734-8485  
info@meriusa.com

**Meri Sistemas e Tecnologia Ltda.**

R. Friedrich von Voith, 825  
São Paulo – SP – 02995-000, Brasil  
Tel. +55 11 3944-6644  
meribrasil@meribrasil.com.br

**Meri Environmental Technology  
(Kunshan) Co.,Ltd.**

No. 665 Jiande Road, Zhangpu Town,  
Kunshan City, 215321 Jiangsu Province,  
China  
Tel. +86 51 28 68 90 834  
info@meri.cn

[www.meri.de](http://www.meri.de)



**Note:** All product-related data and information in this publication shall serve for information purposes only. They shall not be interpreted or intended to represent any kind of warranty or guarantee. The only legally binding statements are those contained solely within our quotations. Errors and omissions excepted. Technical data are subject to change.