
MINIPRESS MPX Screw Press

Cost Effective Screw Press for Fibrous Rejects and Sludges

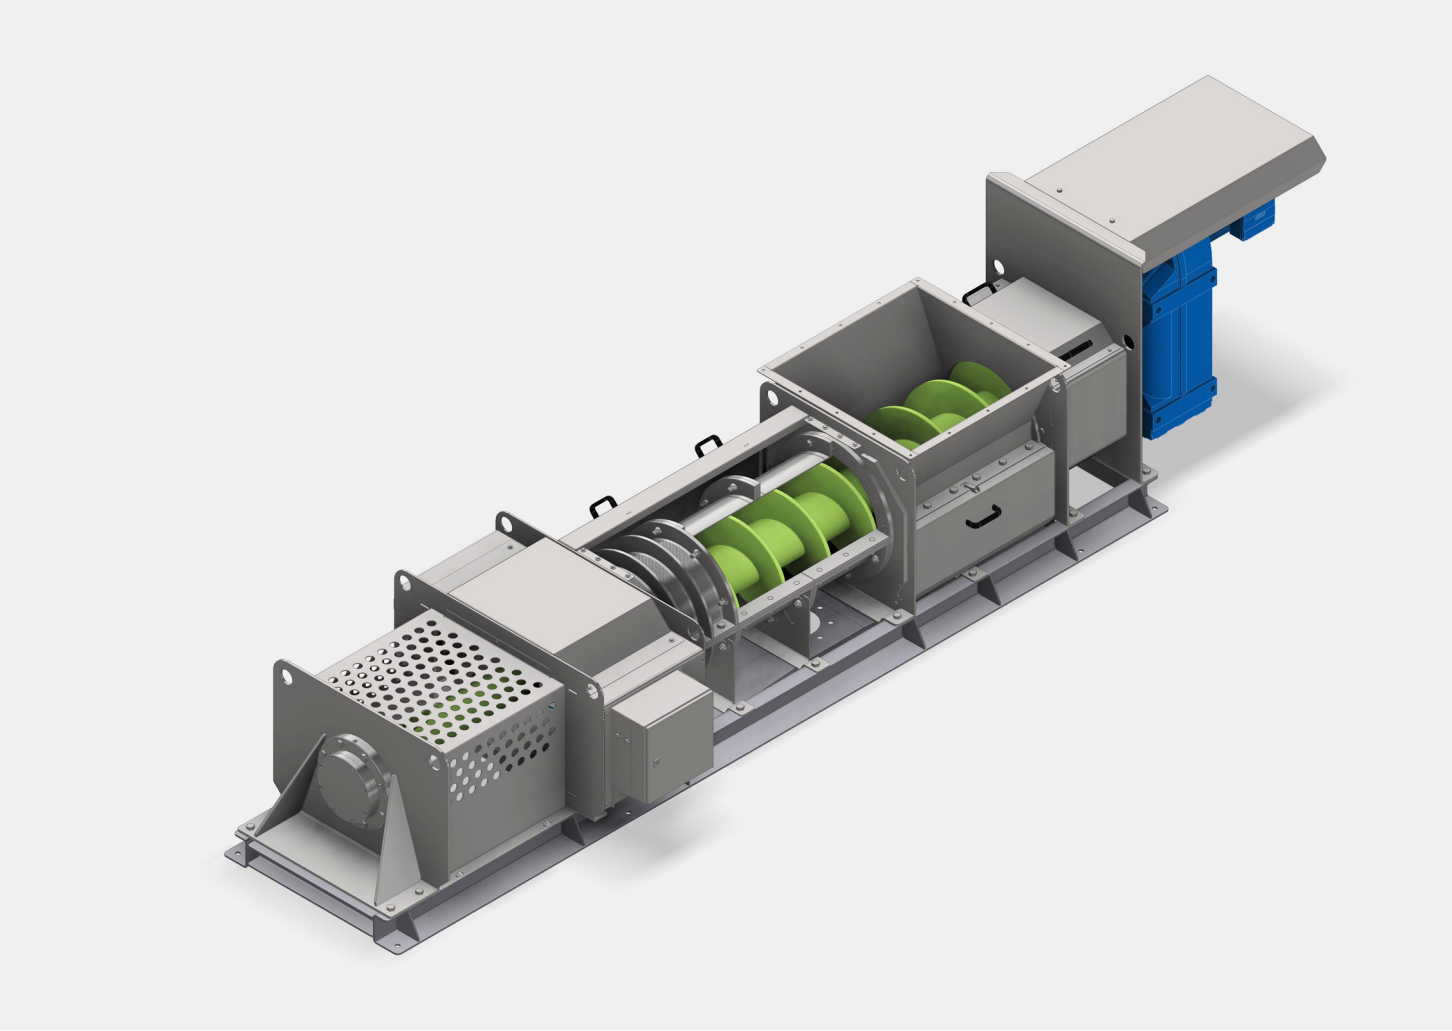

Downloaded & Saved / Printed on 3-11-2026

MINIPRESS MPX Screw Press

Technology

The Minipress is a compact screw press designed to dewater fibrous sludges, reducing handling, transport and disposal costs for paper and plastic recycling industries. It operates by feeding the fine rejects/sludges onto a press screw with cylindrical shaft and constant pitch. The material is initially dewatered by means of gravity and agitation of the screw, and then pressed against the plug formed by the preceding material at the press nozzle, achieving the final dryness. A twin-flap pneumatic system regulates the counter-pressure, maintaining even dewatering and high dryness at the discharge end. Its modular design allows customization based on material characteristics, like fiber content, consistency, and dewatering properties, enhancing operational efficiency and adaptability for varied industrial needs.

Features

- Single flight screw with bearings on both ends and cylindrical shaft.
- Press nozzle with twin flaps for uniform counter pressure operated by air bellows.
- Torque control (by proportional valve) for constantly high discharge dryness.
- Modular exchangeable half screens with different hole patterns allow adaptation to various sludge types.
- Compact, low-maintenance design with accessible screens for easy servicing.
- Machine body and base frame in HDG or stainless steel. Half screens and screw in wear-resistant or stainless steel depending on the application.

Why to buy

- Low capital and installation costs allow multiple de-central installations.
- Low OPEX and minimal maintenance due to screen design with halve screens and minimized amount of wear parts.
- Constantly high discharge dryness up to 55 % due to torque control.
- Low energy consumption.
- Various available press screw diameters and length allow machine adaption to wide range of feed loads and consistencies (1 – 25 bdt/day; 2 – 15 %).





Downloaded & Saved / Printed on 3-11-2026

Typical & Proven Process


- Dewatering of thickened Sludge & Reject mixtures
  - from Cleaning & Fine Screening
  - from Coarse Screening
  - from Water Clarification
  - from Effluent Water Pre-Treatment (DAF units, Primary Clarifiers, ...)

- Dewatering of Residuals
  - from Process Water Treatment of Plastic Recycling Plants, of Air Washers in MDF Production,

See the following Products as well

- Sludge/Reject Pre-Dewatering by ELEPHANT, BlueDrain Belt Thickener.
- Sludge Press RSP 65, 80 & 115
- COMPAX CFX-F 50, 60 & 80
- MSC- Spiral conveyors and related bunker- & container filling- & distribution systems
- POLYMERI Polymer Preparation Unit

Specifications

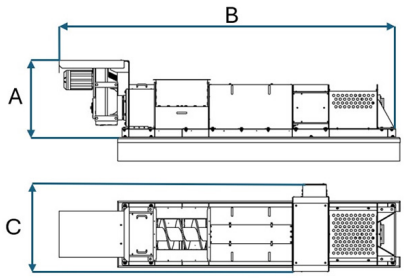

	MPX 30	MPX 40	MPX 50	MPX 60
Screw diameter [mm]	300	400	500	600
Height (A) [mm]	990	1080	1240	1260
Length(*) (B) [mm]	3570 - 4010	4660 - 5520	5430 – 5860	6160 - 6660
Width (C) [mm]	920	1110	1410	1540
Power [kW]	7,5	11	15	15
Dryness	Up to 55%			

(*) The final length of the machine depends on the screen configuration.

Downloaded & Saved / Printed on 3-11-2026

Meri Environmental Solutions GmbH
Bodenseestr. 113
81243 Munich, Germany
Tel. +49 89 59 33 44
info@meri.de

Voith Meri Environmental Solutions, Inc.
2620 E. Glendale Avenue
P.O. Box 1262
Appleton WI 54911-1262, USA
Tel. +1 920 734-8485
info@meriusa.com

Meri Sistemas e Tecnologia Ltda.
R. Friedrich von Voith, 825
São Paulo – SP – 02995-000, Brasil
Tel. +55 11 3944-6644
meribrasil@meribrasil.com.br

Meri Environmental Technology (Kunshan) Co.,Ltd.
No. 665 Jiande Road, Zhangpu Town,
Kunshan City, 215321 Jiangsu Province,
China
Tel. +86 51 28 68 90 834
info@meri.cn

www.meri.de

Note: All product-related data and information in this publication shall serve for information purposes only. They shall not be interpreted or intended to represent any kind of warranty or guarantee. The only legally binding statements are those contained solely within our quotations. Errors and omissions excepted. Technical data are subject to change.

Downloaded & Saved / Printed on 3-11-2026