

RSED Rectangular Sedimentation Clarifier



RSED Rectangular Sedimentation Clarifier

Technology

Sedimentation is used in Industrial Effluent Treatment for Pre- Clarification (chemical-physical solids removal) before Biological Treatment or as Secondary Clarification after Biological Treatment to remove Excess Bio Sludge and other Residuals.

The Rectangular Clarifier Tank is used to separate solids (sludge) from liquids through the process of gravity settling. The Inlet flows from the headbox on one side towards the opposite side allowing particles / contaminants to sink and settle.

The RSED Shield Version comprises back- and forward moving bridge, which holds and pulls a an 2-side bottom scraper transporting Sediment Solids into a bottom collecting funnel from where the collected sediments are discharged or pumped to a sludge tank.

On the back- and forward moving bridge of the RSED Suction Version are mounted submerged suction hoods, which tightly overrun the flat tank floor and aspirate Sediment Solids / Flocks. Aspiration is provided by submerged pumps with speed control.

The clarified water overflows a weir on the opposite side of the tank inlet headbox.


Appearing floating scattered matter is collected by bridge both side mounted deflection skim plates and forwarded on each side to a "Floating Skimmer Trough" which scoops a thin fluid film with the floated residuals, which is typically pumped to sludge treatment.

Features

- RSED - SHIELD Clarifier with bottom scraper (Primary Clarification) or alternatively RSED - SUCTION Clarifier with submerged mounted suction hoods, which tightly overrun and flat tank floor and aspirate sediments (Secondary Clarification).
- Rectangular Tank Design in concrete
- "Floating Skimmer Trough" which scoops a thin fluid film with the floated residuals
- Extreme sturdy and reliable Design for trouble free performance

Why to buy

- Reliable Sedimentation Technology for industrial Wastewater Treatment
- Modular 3D design allows easy customizing and cost-effective realization
- CSED design allows SHIELD or SUCTION Technology depending on application
- Multiple Material configurations for machine and tank components available HDG, Stainless, etc.

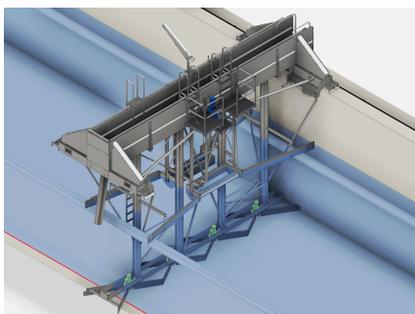


Typical & Proven Process

- Primary Clarification (chemical-physical solids removal) before Biological Treatment
- Secondary Clarification after Biological Treatment to remove Excess Bio Sludge and other Residuals.

See the following Products as well

- DINOSCREEN solid removal from U-drains
- Dissolved Air Flotation Clarifiers - DELTAPURGE , TAURO- Series, Basic- and Quadra- Float
- ELEPHANT Disc Thickener
- BLUEDRAIN and RSP Press for Sludge dewatering
- GYROSAND Filtration

Specifications

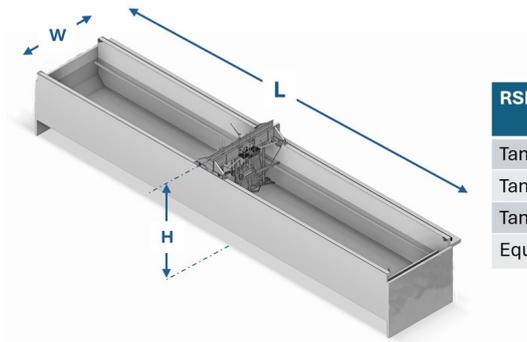

RSED Rectangular Sedimentation	SHIELD Type Bottom Scraper	SUCTION Type Bottom Scraper
Tank Design	rectangular in concrete	rectangular in concrete
Tank Width W [m]	custom design 4 m – 10 m	custom design 4 m – 10 m
Tank Length L [m]	custom design 10 m – 80 m	custom design 10 m – 80 m
Equipment Height H [m]	ca. 7.250 mm	ca. 7.850 mm



Meri Environmental Solutions GmbH

Bodenseestr. 113
81243 Munich, Germany
Tel. +49 89 59 33 44
info@meri.de

Voith Meri Environmental Solutions, Inc.

2620 E. Glendale Avenue
P.O. Box 1262
Appleton WI 54911-1262, USA
Tel. +1 920 734-8485
info@meriusa.com

Meri Sistemas e Tecnologia Ltda.

R. Friedrich von Voith, 825
São Paulo – SP – 02995-000, Brasil
Tel. +55 11 3944-6644
meribrasil@meribrasil.com.br

**Meri Environmental Technology
(Kunshan) Co.,Ltd.**

No. 665 Jiande Road, Zhangpu Town,
Kunshan City, 215321 Jiangsu Province,
China
Tel. +86 51 28 68 90 834
info@meri.cn

www.meri.de



Note: All product-related data and information in this publication shall serve for information purposes only. They shall not be interpreted or intended to represent any kind of warranty or guarantee. The only legally binding statements are those contained solely within our quotations. Errors and omissions excepted. Technical data are subject to change.