


SEDIPHANT – The Eliminator

Unique Reject 3-Phase Separation

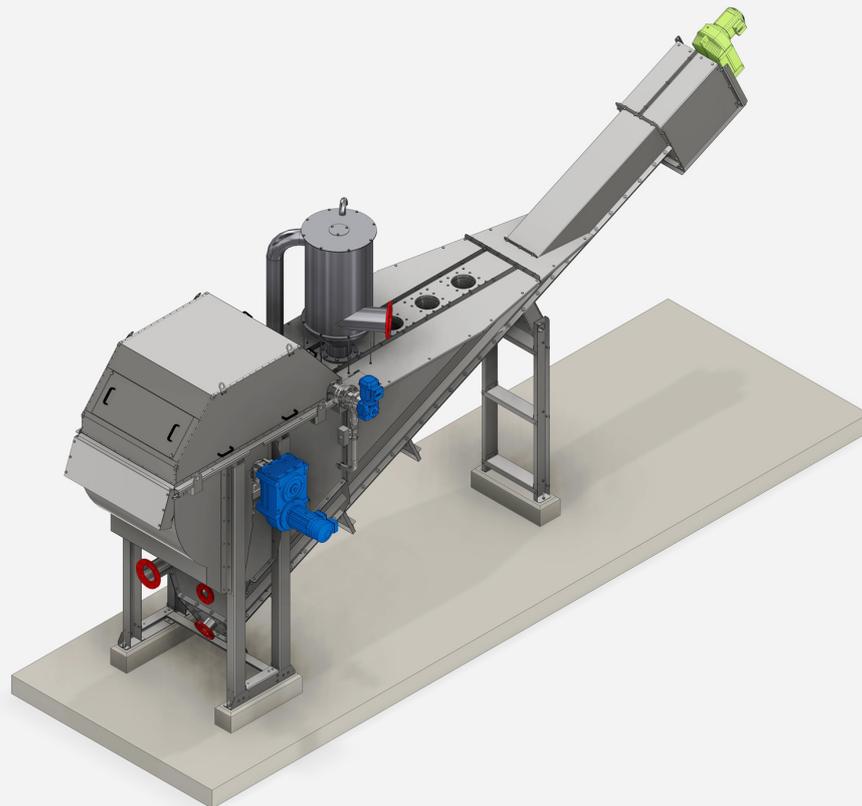

SEDIPHANT – The Eliminator

Unique Reject 3- Phase Separation

Technology

Paper Industry Pulping Fine Rejects Streams from HC Cleaners or combined “De-Trashing Screens” are a challenge as Small Heavy Rejects as sand , glass, staples etc. appear in dumps with water and in case with high fiber contents. The SEDIPHANT ist the only equipment which allows 3- phase separation in a “Heavy Fraction” (sand, glass etc.) a “Pre-densified Fiber Fraction” and “Filtered Water”.

The Dumps of Small Heavy Rejects are flushed into a Sedi-Cyclone on the top of the SEDIPHANT to transform the vertical dumps into a uniform horizontal flow pattern into the SEDIPHANT trough. Small Heavy Rejects, such as sand, glass, staples etc. sink to the spiral conveyor on the trough bottom which transports them to the upper discharge.

Fibers float with the water/suspension stream towards the rotating disc pairs which provide filtration while thickening up a fiber mat which is discharged on the opposite side.

Filtered water/suspension is collected on the disc filtrate inner side to be forwarded to further treatment, pre thickened fiber to be recovered and brought back to pulping process.



Tank / trough water level and disc speed allow control of the dewatering characteristics.

Features

- High performance 3 phase separation of (dis-) continuous Reject dumps for HC Cleaner and / or “De-Trashing Screens” into “Heavy Fraction” (sand, glass etc.) a “Pre-densified Fiber Fraction” and “Filtered Water”.
- High Capacity on small installation space, direct discharge of cleaner residual fraction (sand, glass etc.)
- Pre- thickened fiber to be recovered and brought back to pulping process increases yield.
- Pre- treated water avoids spilling and fiber build up in U- Drain Channels and secures safe and clean working environment.

Why to buy

- SEDIPHANT – The Eliminator – provides unique Reject 3- Phase Separation
- Better Separation of “Small Heavy Reject Fraction” (sand, glass etc.) is a disposal advantage
- Additional Fiber Recovery form Reject Streams e.g. in overloaded HC Cleaning Stages
- Pretreated and controlled water streams avoid overflows and secures safe and clean working environment

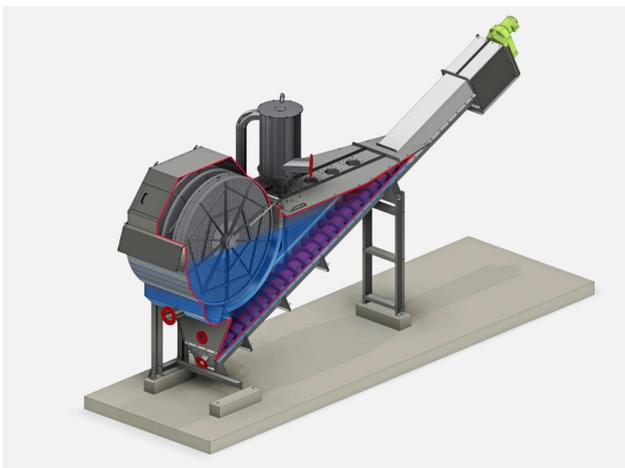


Typical & Proven Process

- Treatment of HC Cleaner small heavy weight Reject
- Treatment of small heavy weight Reject from combined “De-Trashing Screens”
- Treatment of heavy loaded and contaminated process streams

See the following Products as well

- SEDIMATOR
- COMPAX CFX 80R, 60R and 50R and ECOMPAX
- Reject Pre-Dewatering with ELEPHANT Disk Thickener
- Bluedrain and Fiber Residual Screw Press RSP
- SCREENEX and TREX

Specifications

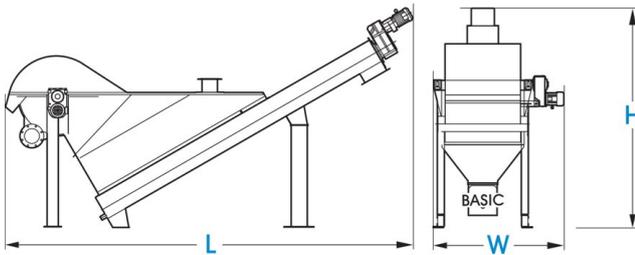

Model	Max.Length L [mm]	Max.Height H [mm]	Max.Width W [mm]	Number of Disc Pairs	Disc Diameter [mm]	Throughput [m ³ /h]
3.10	5380	2700	1860	3	1000	8-30
3.16	5850	3200	2313	3	1600	30-85
4.16	5850	3200	2610	4	1600	40-110
5.16	5850	3200	3015	5	1600	60-145
X.16	-	-	-	upon request	1600	acc.application
X.21	-	-	-	upon request	2100	acc.application



Meri Environmental Solutions GmbH

Bodenseestr. 113
81243 Munich, Germany
Tel. +49 89 59 33 44
info@meri.de

Voith Meri Environmental Solutions, Inc.

2620 E. Glendale Avenue
P.O. Box 1262
Appleton WI 54911-1262, USA
Tel. +1 920 734-8485
info@meriusa.com

Meri Sistemas e Tecnologia Ltda.

R. Friedrich von Voith, 825
São Paulo – SP – 02995-000, Brasil
Tel. +55 11 3944-6644
meribrasil@meribrasil.com.br

**Meri Environmental Technology
(Kunshan) Co.,Ltd.**

No. 665 Jiande Road, Zhangpu Town,
Kunshan City, 215321 Jiangsu Province,
China
Tel. +86 51 28 68 90 834
info@meri.cn

www.meri.de



Note: All product-related data and information in this publication shall serve for information purposes only. They shall not be interpreted or intended to represent any kind of warranty or guarantee. The only legally binding statements are those contained solely within our quotations. Errors and omissions excepted. Technical data are subject to change.